


呼び寸法 RANGE	許容差の区分 COMMON TOLERANCE
≤ 10	±0.1 ±0.2 ±0.4 ±
≤ 25	±0.15 ±0.3 ±0.6 ±
≤ 80	±0.25 ±0.5 ±1.0 ±
≤ 250	±0.4 ±0.8 ±1.5 ±
≤ 1000	±1.0 ±2.0 ±6.0 ±

形式

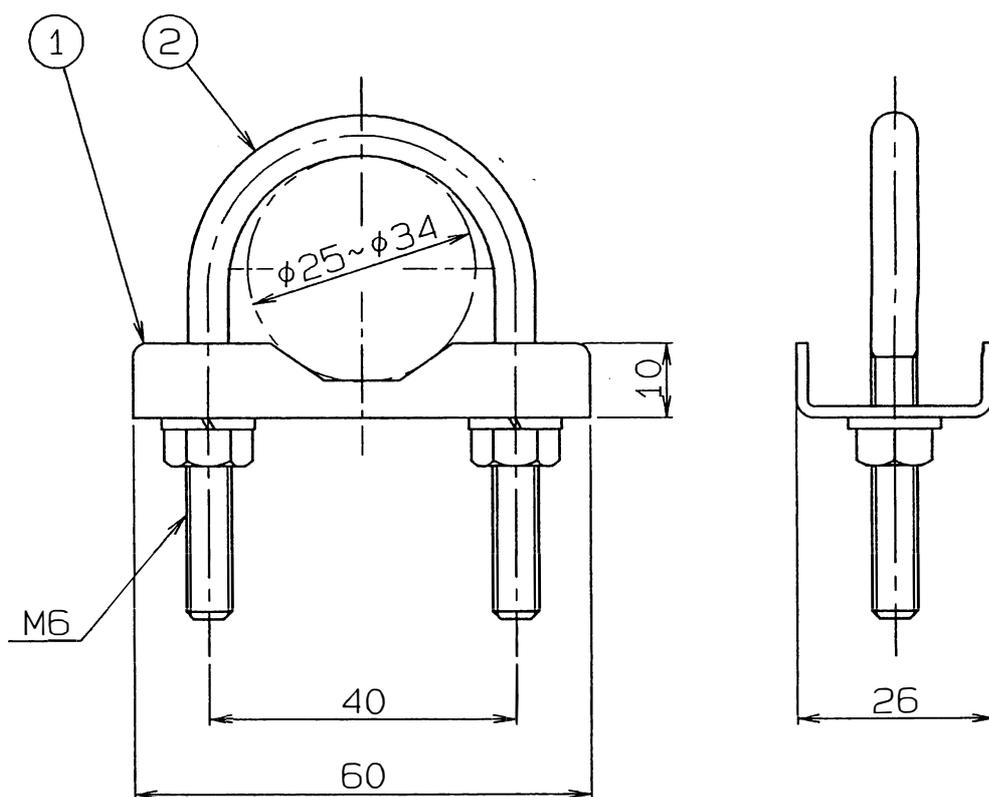

重量 約0.07kg
最大受風面積 約0.002m²

△					2	Uボルト	1	SUS304P		
△					1	コの字金具	1	SUS304P		t=1.5
△					部番	名	体	個数	材	質・処
△					ITEM	DESCRIPTION	QUANTITY	MATERIAL	TREATMENT	PART DRAWING No.
△					SCALE	DESIGNED	DRAWN	INSPECTED	APPROVED	
△					R	担	製	検	承	
△					度	当	図	図	認	
△					単	位	重	品		
△					DIM	m・m	WEIGHT	DESCRIPTION		
△								名 C-23型取付金具		
△					日本アンテナ株式会社 NIPPON ANTENNA CO., LTD.				図 DRAWING No. 番 P9-Q02-H01	
△	符号	日付	変更	記事	担当	承認				
XXXX	SYM	DATE	REVISION	RECORD	DESIGNER	APPROVED				